Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 112168

LIGITEK

NPN SILICOM PHOTOTRANSISTOR LED LAMPS **LPT3313** SERIES

Package Dimension

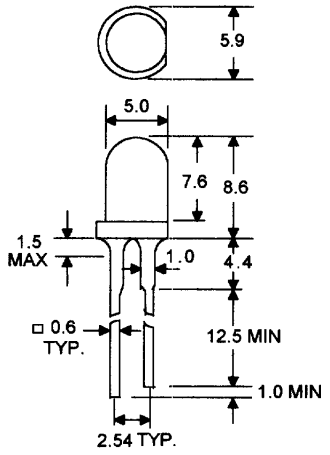

Note:All dimension are in millmeter tolerance is ± 0.25mm unless otherwise noted.

Features

- High illumination sensitivity
- Stable characteristics
- Spectrally and mechanically matched with IR emitter

Description

The LPT3313 series are silicon nitride passivated NPN planar phototransistors with exceptionally stable characteristics and high illumination sensitivity the cases of LPT3313 are encapsulated in clear plastic T1 3/4 package individually

. **MAXIMUN RATINGS (TA=25℃)**

PARAMETER	MAXIMUM RATINGS	UNIT
Power Dissipation	100	mw
Collect-Emitter Voltage	30	V
Emitter-Collect Voltage	5	V
Operating Temperature	-50℃ TO +100℃	
Storage Temperature Range	-50℃ TO +100℃	
Lead Soldering Temperature (1.6mm From Body)	260℃ for 5 seconds	

. **ELECTRICAL CHARACTERISTICS (TA=25℃)**

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Collect-Emitter Breakdown Voltage	V(BR)CEO	30			v	Ic=1mA Ee=0mw/cm²
Emitter-Collector Breakdown Voltage	V(BR)ECO	5			v	Ie=100mA Ee=0mw/cm²
Collect-Emitter Saturation Voltage	VCE(sat)			0.4	v	Ic=0.5mA Ee=20mw/cm²
Rise Time	tr		5		μs	Vce=30v ic=800μA, RL=1KΩ
Fall Time	tf		5		μs	
Collector Dark Current	Iceo			100	nA	Vce=10v Ee=0mw/cm²
On State Collector Current	Ip(on)	1		2	mA	Vce=5v Ee=1mW/cm² λ=940nm
		2		4	mA	
		4		8	mA	
		8			mA	

文件編號:QW0905-LPT3313 版本:A 生效日期: Jun . 7 . 1996